


200 TONNE

Demag AC200 All Terrain

SPECIFICATIONS

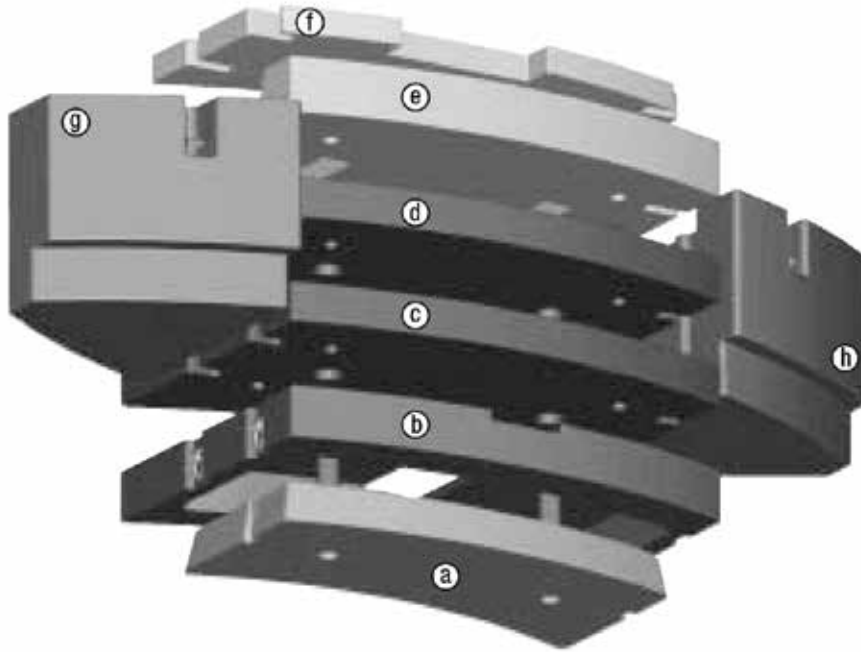

	Ⓐ 5,7t	Ⓑ 7,3t	Ⓒ 9,0t	Ⓓ 9,0t	Ⓔ 9,1t	Ⓕ 3,2t	Ⓖ 12,8t	Ⓗ 12,8t
8,9 t	X					X		
13,0 t	X	X						
14,8 t	X		X					
16,3 t	X	X				X		
18,0 t	X		X			X		
22,1 t	X	X	X					
25,3 t	X	X	X			X		
31,1 t	X	X	X	X				
34,4 t	X	X	X	X		X		
40,2 t	X	X	X	X	X			
43,4 t	X	X	X	X	X	X		
59,9 t	X	X	X	X		X	X	X
69,0 t	X	X	X	X	X	X	X	X



200 TONNE

Demag AC200 All Terrain

SPECIFICATIONS

AXLE LOADS					
Basic machine with hook block					
Axles					5 x 12 000 kg
Total					60 000 kg
WORKING SPEEDS (INFINITELY VARIABLE)					
Mechanisms	Normal speed	High speed	Max. permissible line pull ¹⁾	Rope diameter / Rope length	
Hoist I	45 m/min	125 m/min	98,2 kN	21 mm / 345 m	
Hoist II	45 m/min	125 m/min	98,2 kN	21 mm / 345 m	
Slewing				max. 1,3 ¹ /min	
Boom elevation				-1,5° – +82°	
CARRIER PERFORMANCE					
Travel speed					0 .. 85 km/h max. 71 %
HOOK BLOCK / SINGLE LINE HOOK					
Type	Possible load ¹⁾	Number of sheaves	Weight	„D“	Number of lines
200	147,2 t	9	1750 kg	3,00 m	16
160	138,7 t	7	1500 kg	3,00 m	15
125	103,7 t	5	1125 kg	3,00 m	11
80	67,3 t	3	850 kg	3,00 m	7
32	29,4 t	1	600 kg	2,70 m	3
12,5	9,9 t	Single line hook	350 kg	2,00 m	1
Remarks					
1) varies depending on national regulations					