


250 TONNE

Grove 5250L All Terrain

SPECIFICATIONS

Counterweight

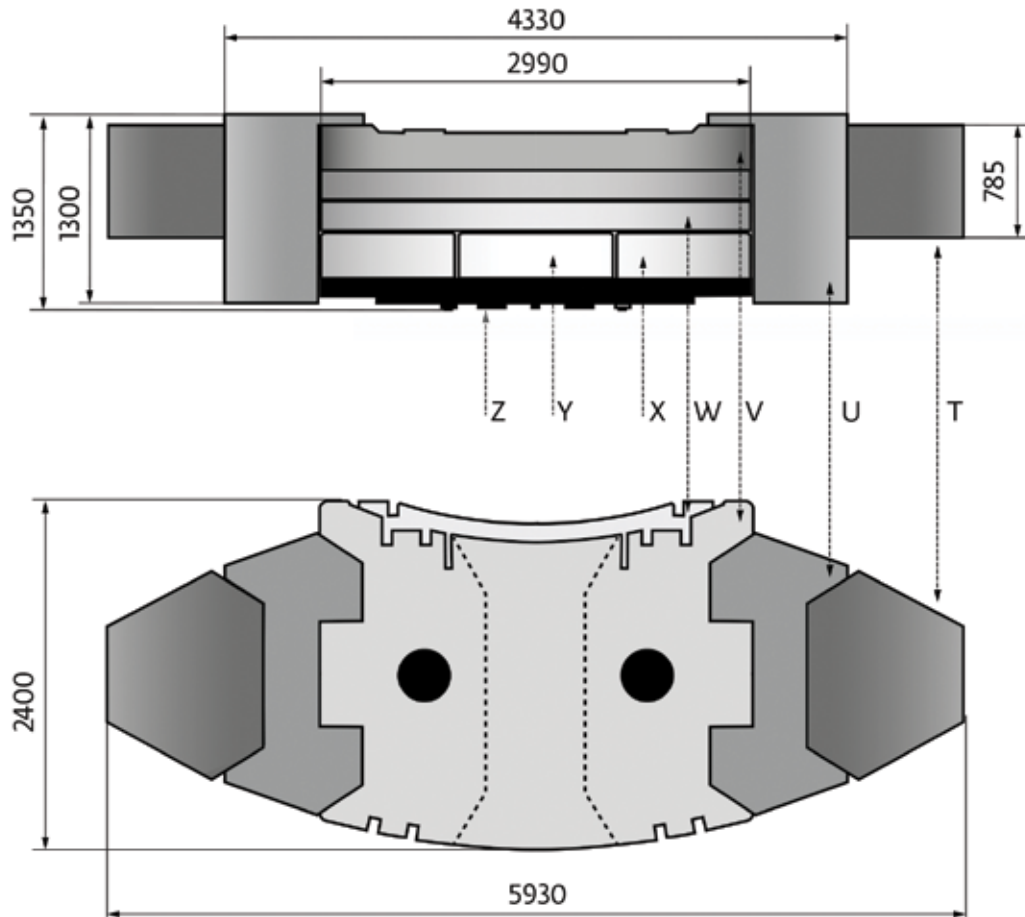

	Z 7,0t	Y 4,5t	X 4,75t	W 9,5t	V 10,0t	U 10,0t	T 5,0t
7,0t	x						
16,5t	x		2x				
21,0t	x	x	2x				
26,0t	x		2x	x			
30,5t	x	x	2x	x			
35,5t	x		2x	2x			
40,0t	x	x	2x	2x			
45,5t	x		2x	2x	x		
50,0t	x	x	2x	2x	x		
70,0t	x	x	2x	2x	x	2x	
80,0t	x	x	2x	2x	x	2x	2x


250 TONNE

Grove 5250L All Terrain

SPECIFICATIONS

Jib combinations

	LxWxH (m)	kg
A	4,2x1,0x1,6	1760
B	8,7x7,2x1,1	712
C	9,0x0,5x0,9	525
D	8,2x0,7x1,1	650
E	8,2x0,9x1,2	715

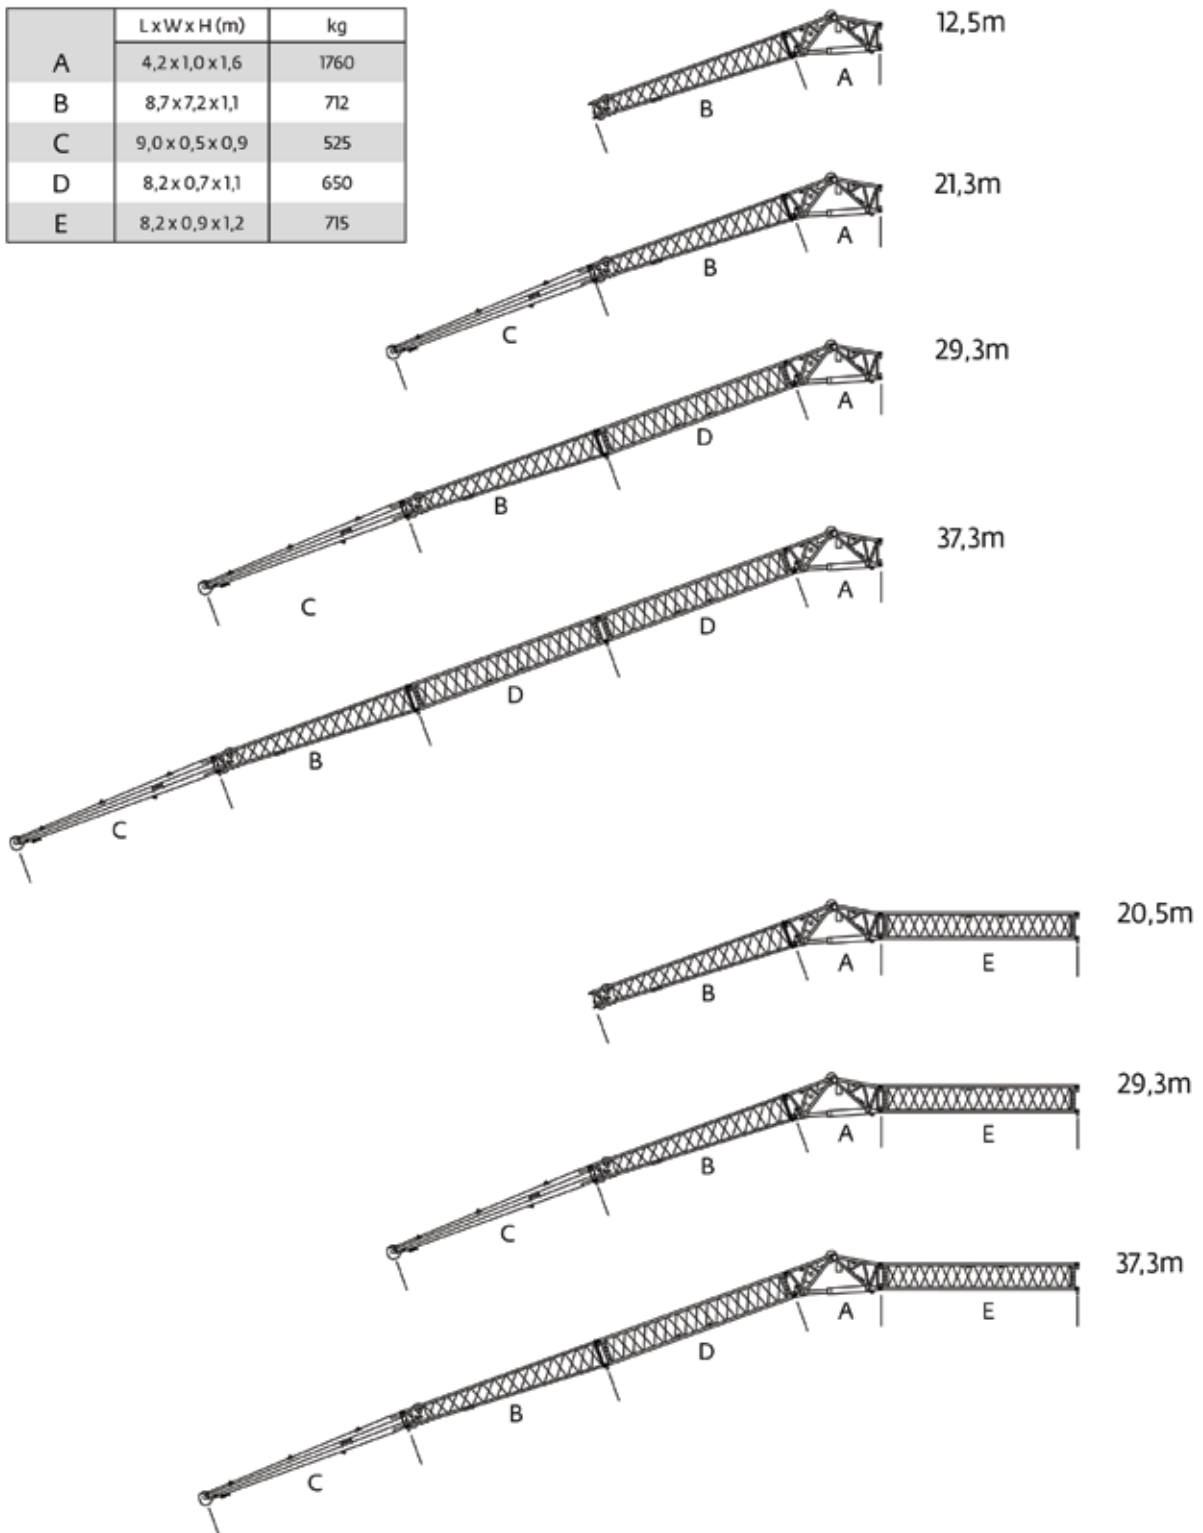

250 TONNE

Grove 5250L All Terrain

SPECIFICATIONS



Axle	1	2	3	4	5	Total weight
t	12	12	12	12	12	60*

* with 0 t counterweight, 10x6x10, 445/95 R25 tyres, retarder • mit 0 t Gegengewicht, 10x6x10 445/95 R25 Reifen, Retarder • avec contre-poids 0 t, 10x6x10, pneus 445/95 R25, ralentisseur
 Con contrapeso de 0 t, 10x6x10, neumáticos 445/95 R25, retardador • con contrapeso 0 t, 10x6x10, pneumaticos 445/95 R25, ralentizadora • с противовесом 0 т, 10x6x10, шины 445/95 R25, узладителен



Lifting Capacity	Sheaves	Weight	Parts of line	Possible load with crane*
200 t	9	2400 kg	2-18 •	180 t •
160 t	7	1750 kg	2-15	150 t
125 t	5	1650 kg	2-11	110 t
80 t	3	950 kg	2-7	70 t
32 t	1	600 kg	2-3	30 t
12 t	H/B	300 kg	1	10 t

* varies depending on national regulations

• 0* over rear with additional equipment



	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	R	
km/h	6,8	8,2	10,4	12,2	15,1	18,3	22,1	26,6	30,1	36,3	44,6	54,4	66,7	80,3	85,0	85,0	6,0	50 %
	14.00R25 (385/95R25), 16.00R25 (445/95R25), 20.5R25 (525/80R25)																	

* Theoretical gradeability



	Infinitely variable	Rope	Max. single line pull
	0 - 125 m/min Single line	22 mm/300 m	104,0 kN
	0 - 125 m/min Single line	22 mm/330 m	104,0 kN
	0 - 1,45 min ⁻¹		
	-1,5° to + 82° approx. 65 s		
	13,3 to 70,0 m approx. 515 s		